

Typical Stay Lengths for a Paper Tiger Catamaran


Note: Dimensions are typical only and are taken from PT 3076. Note that the tolerances in hound position and chainplate position can result in different length stays being required. However, the adjustment in the turnbuckle systems should allow these dimensions to suit most PTs.



DRN: David Stumbles	CHKD: Terry Valder	REV. No: 2	REV. DATE: 21-05-2009
DATE: 14-12-2007	SCALE: NTS	© Paper Tiger Catamaran International Association (PTCIA)	

For Paper Tiger Catamaran assistance & suggestions for these Guides contact PTCIA Secretary David Stumbles on +61 (0) 400 476 449 or ptcia@papertigercatamaran.org or visit www.papertigercatamaran.org

File: Guide - Stay Lengths.ppt

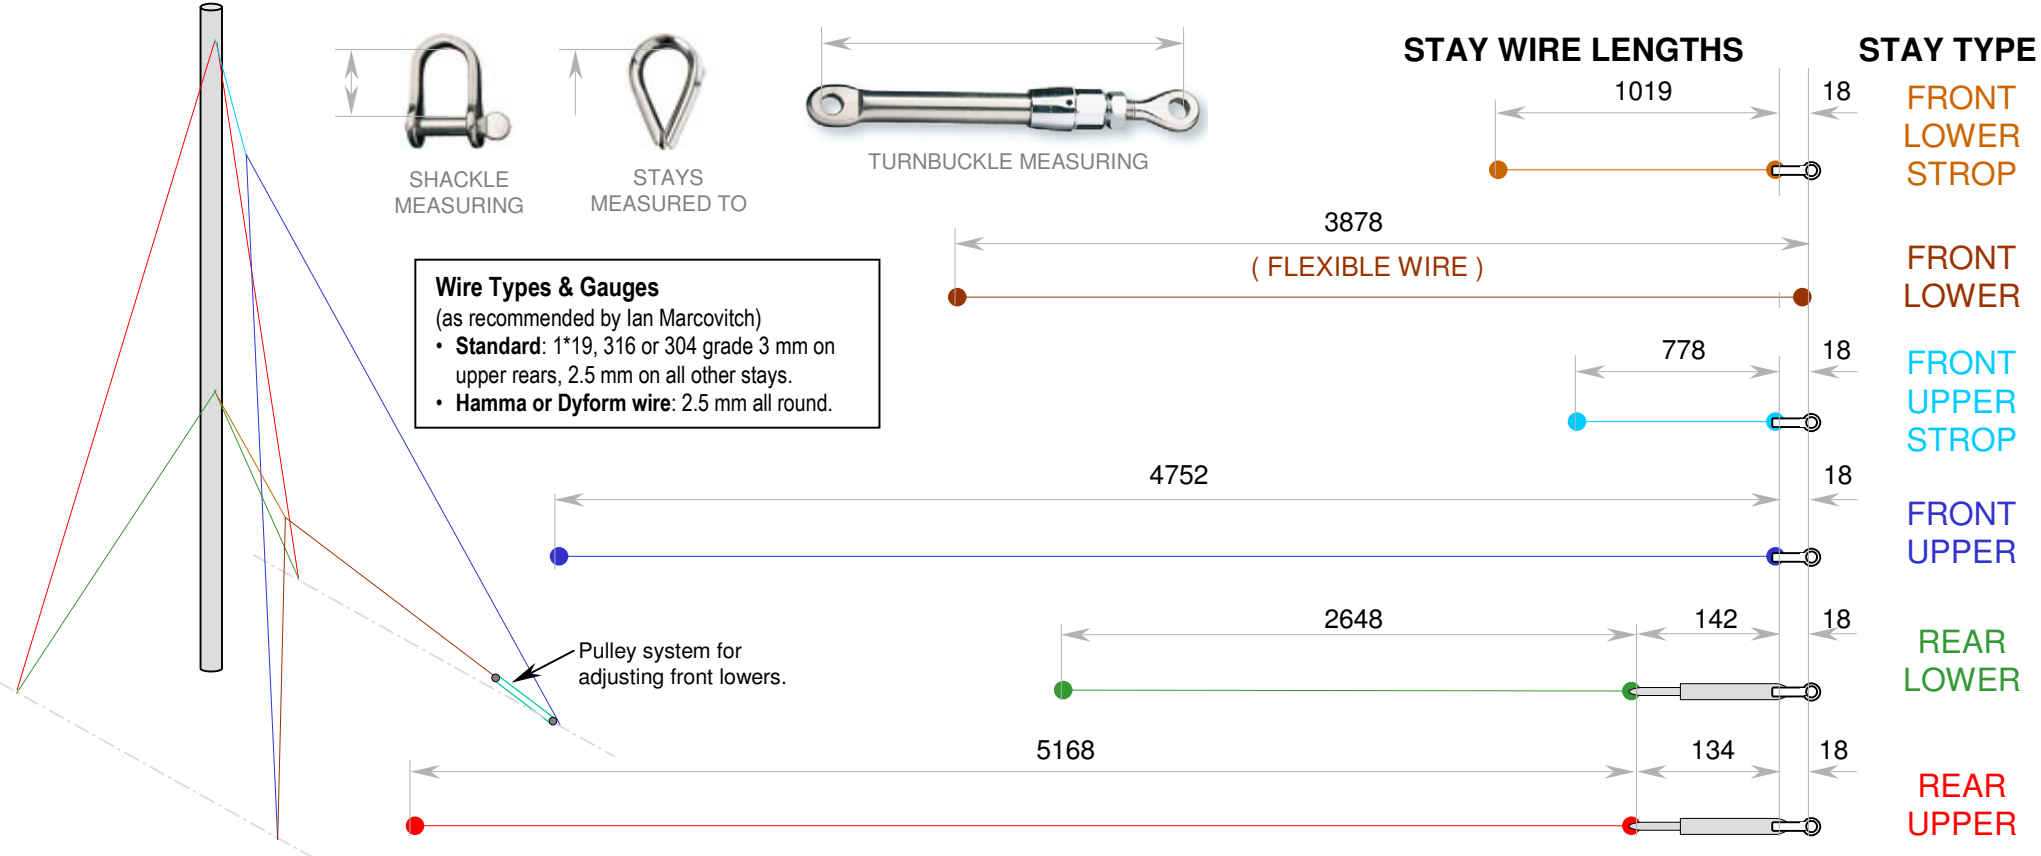

Notes:

- Wire lengths measured from inside of thimble (ie. where shackle pin would be bearing on)
- Standard shackles used (18mm internal length) except where Front Uppers attach to Front Strop and where all Uppers attach to Top Hound, where 24mm shackles are used.
- Front lower will join one front chainplate and go up over a pulley on the end of the strop, back down towards the other front chainplate. Between this end of the wire and the chainplate will be a pulley system for adjusting the length of the front lowers for different wind strengths and angles.

