

Aluminium Vang Spanner for Paper Tiger Catamaran

For mast plugs that don't have a spanner pivot built in (ie spanner has to be bolted through mast).




Note: Dimensions are typical only.

| | | | |
|---------------------|--------------------|---|-----------------------|
| DRN: David Stumbles | CHKD: Terry Valder | REV. No: 2 | REV. DATE: 10-06-2009 |
| DATE: 04-03-2009 | SCALE: NTS | © Paper Tiger Catamaran International Association (PTCIA) | |

For Paper Tiger Catamaran assistance & suggestions for these Guides contact PTCIA Secretary David Stumbles on +61 (0) 400 476 449 or ptcia@papertigercatamaran.org or visit www.papertigercatamaran.org

File: Guide - Vang Spanner - through mast.ppt

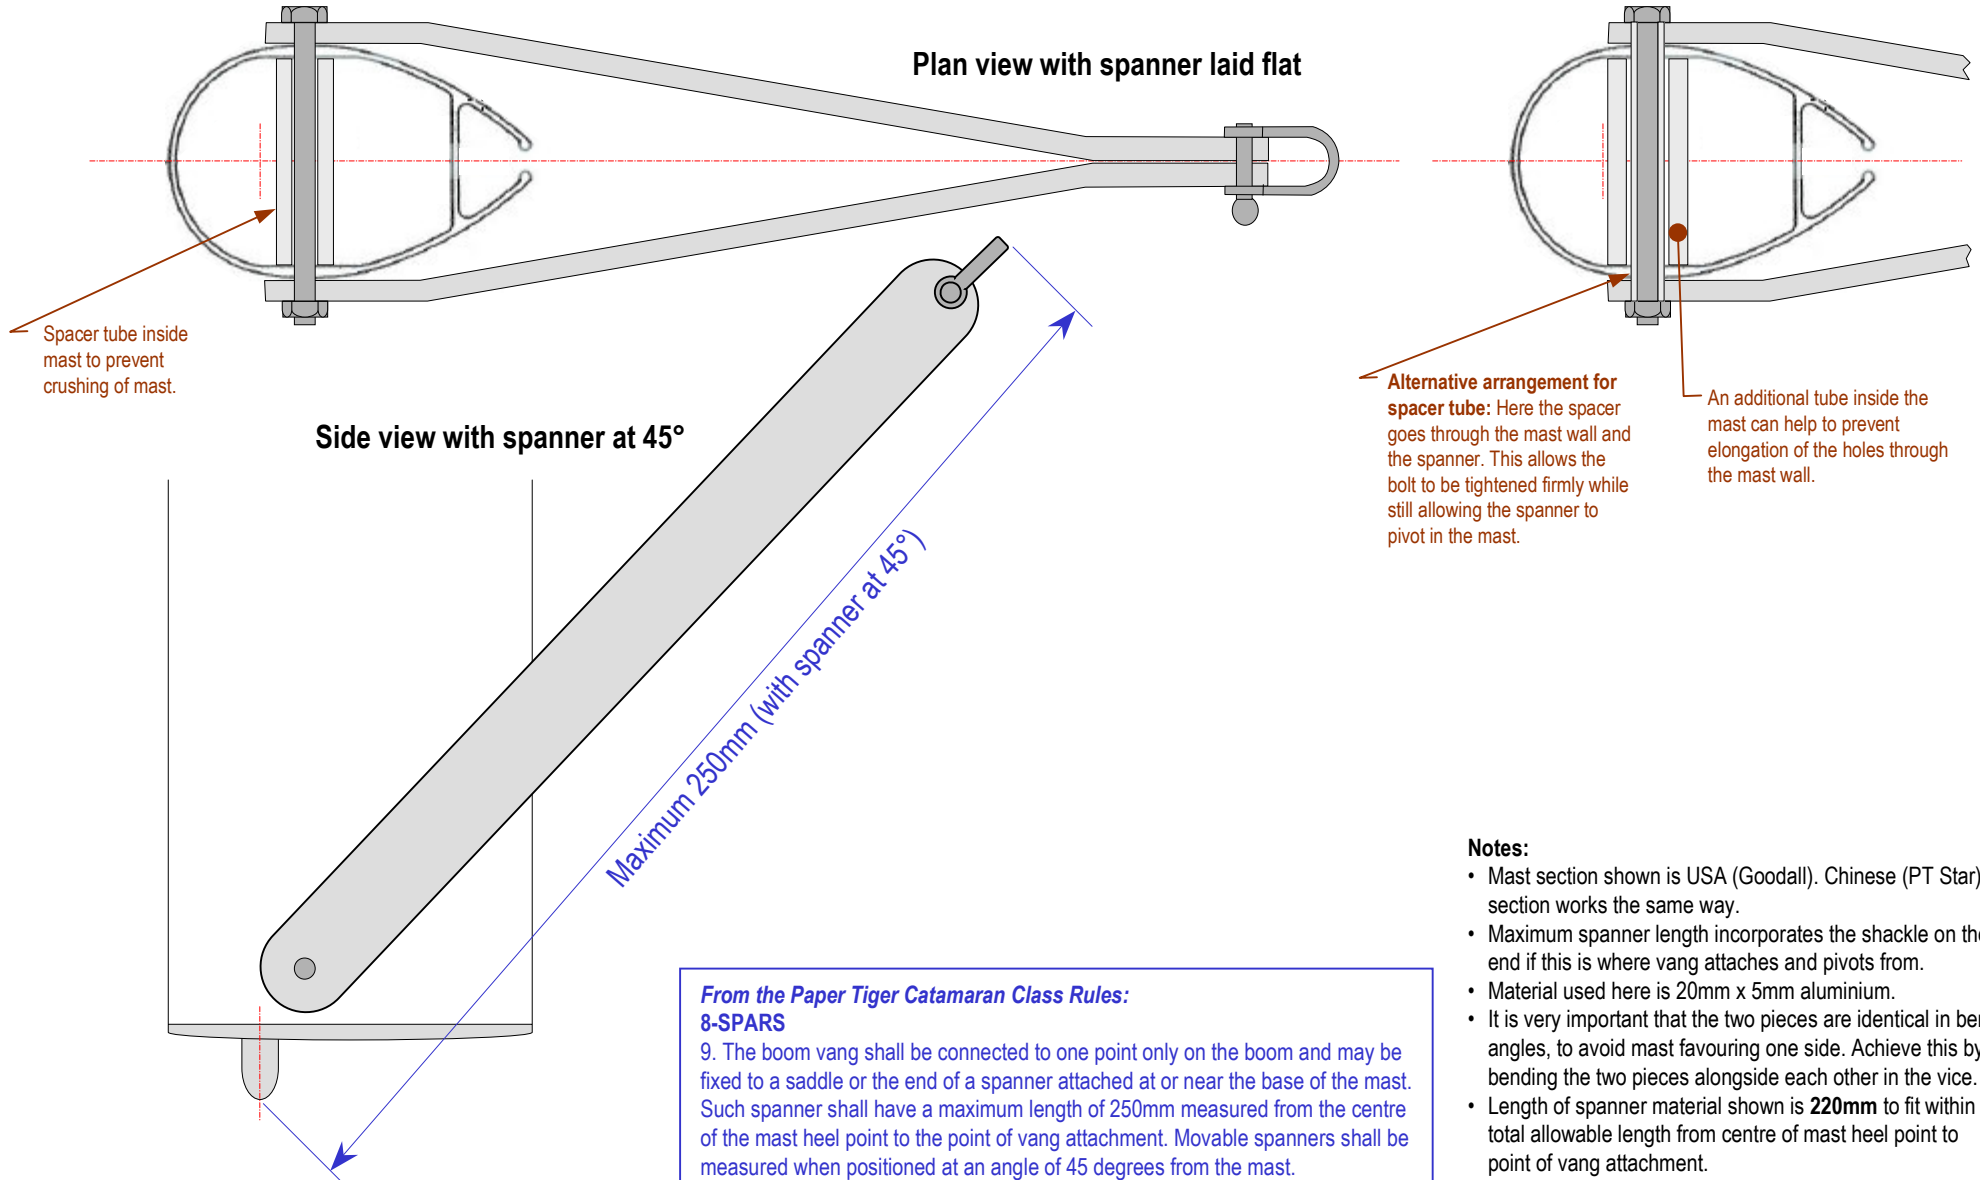

From the Paper Tiger Catamaran Class Rules:
8-SPARS
 9. The boom vang shall be connected to one point only on the boom and may be fixed to a saddle or the end of a spanner attached at or near the base of the mast. Such spanner shall have a maximum length of 250mm measured from the centre of the mast heel point to the point of vang attachment. Movable spanners shall be measured when positioned at an angle of 45 degrees from the mast.